




P6 Perimeter Warning Light

The P6 is a little light with a big attitude! Following the success of the P14 with its unique 45° angle mounted LEDs, the P6 goes one step further with the introduction of patented flexible optic technology. The P6 generates a true, uniform 180° signal of protection from a single, fixed light head. The off angle performance is almost as bright as the head on.



The P6 has unlimited application capabilities with dual rows of LEDs, each independently controlled, and a lower row override function. The P6 can be ordered with a 16 gauge stainless steel brush guard, 1/8" black anodized brush guard, or no guard at all. The P6 is NFPA compliant in both upper and lower zones. "This is one mighty bright little light!"

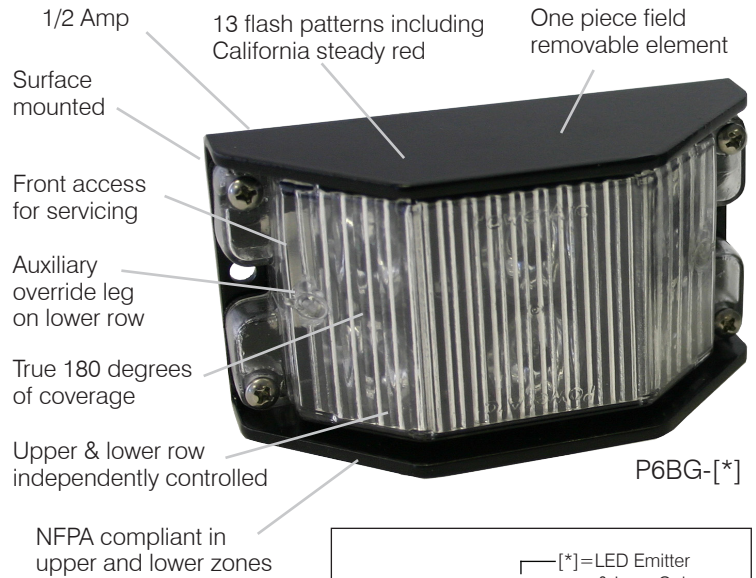


P6BG-[*]

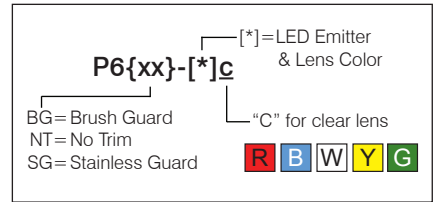

Dual color P6BG-[1][2]

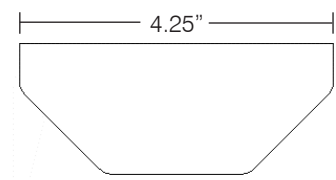


P6NT-[*]

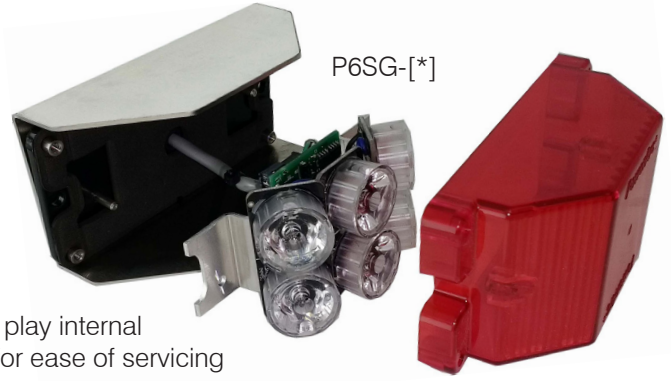


P6SG-[*]

Plug and play internal element for ease of servicing

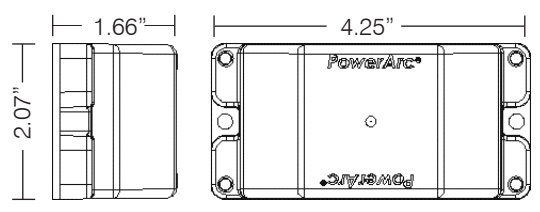

P6NT-[*]

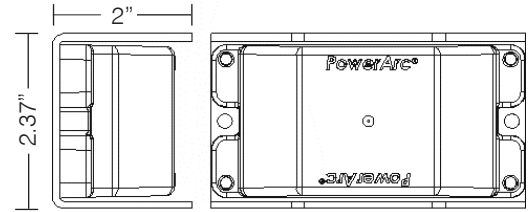

P6BG-[*] & P6SG-[*]

Model	Product Description
	[*] Emitter and lens colors (R,B,W,Y,G)
P6NT-[*]	Pulsing LED surface mounted light - no guard, mounting plate the size of the lens
P6BG-[*]	Pulsing LED surface mounted light - with black anodized aluminum brush guard
P6SG-[*]	Pulsing LED surface mounted light - with stainless steel brush guard
P6 Lens	(FPA-5408 Red) (FPA-5409 Blue) (FPA-5410 Clear) (FPA-5411 Yellow) (FPA-5412 Green)